


**BRING THE OUTSIDE IN.
NORTH AMERICA'S CHOICE SINCE 2005**

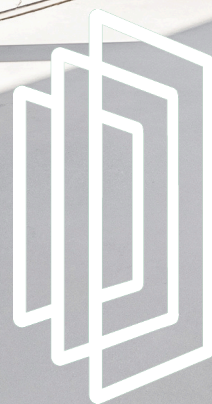

FSDC 
FOLDING SLIDING DOORS CANADA LTD

FOLDING SLIDING DOORS CANADA LTD

105 - 1155 St Paul Street, Kelowna, BC, V1Y2C6

www.FoldingSlidingDoors.ca

Email: sales@foldingslidingdoors.ca / Ph: 1-250-448-6418

Follow Us @foldingslidingdoorscanada

FD72 - THERMALLY BROKEN ALUMINUM FRAME



Crafted for strength, efficiency, and customized to reflect your unique style in every fold and slide.

PAINTED FRAME COLOURS (INTERIOR + EXTERIOR)



Additional custom-painted colours available.
Additional charges and extended lead times apply for all painted frames. Ask us for details.

PANELS	Width (RO)		Height (RO)	
	Min (in)	Max (in)	Min (in)	Max (in)
3	60	132	32	125
4	112	168	32	125
5	140	218	32	125
6	168	250	32	125
7	196	290	32	125
8	224	330	32	125
9	252	370	32	125
10	280	412	32	125
12	336	500	32	125

FD72 U-Value Range: 1.39 - 1.90 (W/m²-K) / .24 - .34 (Btu/h/ft²-F)


FD27 - UPVC FRAME

PANELS	Width (RO)		Height (RO)	
	Min (in)	Max (in)	Min (in)	Max (in)
2	56	75	36	96
3	75	109	36	96
4	112	145	36	96
5	140	178	36	96


For configurations over 5 panels, please select the thermally broken aluminum frame option shown above.

FD27 U-Value Range: 1.12 - 1.70 (W/m²-K) / .19 - .30 (Btu/h/ft²-F)

FRAME COLOURS (INTERIOR + EXTERIOR)



NOTE: Jet black interior wrap is only available when jet black exterior is chosen.

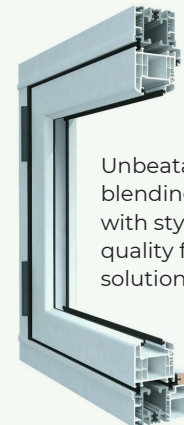

Unbeatable value, blending affordability with style and lasting quality for a smart, stylish solution.

FD73 - ALUMINUM EXTERIOR / SOLID WOOD INTERIOR FRAME



The sophistication of solid wood and the strength of aluminum — a seamless blend of style and endurance.

STAINED FRAME COLOURS (INTERIOR)



See FD72 above for standard exterior frame colours.
Additional custom-painted colours available.
Additional charges and extended lead times apply for all painted frames. Ask us for details.

PANELS	Width (RO)		Height (RO)	
	Min (in)	Max (in)	Min (in)	Max (in)
3	60	120	32	120
4	112	157	32	120
5	140	196	32	120
6	168	232	32	120
7	196	271	32	120
8	224	307	32	120
9	252	347	32	120
10	280	384	32	120
12	336	460	32	120

FD73 U-Value Range: 1.35 - 1.85 (W/m²-K) / .23 - .33 (Btu/h/ft²-F)